

09-28-00

A

Date of Deposit: September 27, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner For Patents, Washington, D.C. 20231

By: Benjamin Trella

JC904 U.S. PTO
09/671393
09/27/00

Attorney's Docket No. XER 2 0318
D/98627 I

UTILITY PATENT APPLICATION TRANSMITTAL LETTER
(Only for nonprovisional applications under 37 CFR 1.53(b))

Assistant Commissioner for Patents
Washington, D.C. 20231

Transmitted herewith for filing in a continuation-in-part patent application of:

GAURAV SHARMA AND KEITH T. KNOX

Entitled: **SHOW-THROUGH COMPENSATION APPARATUS AND METHOD**

This application is a continuation-in-part of co-pending U.S. Patent Application Serial No. 09/200,984, filed November 30, 1998.

Enclosed are:

- ☒ 18 sheets of specification, 4 sheets of claims, 1 sheet of Abstract.
- ☒ 7 sheets of drawings, Figures 1 - 7.
- ☒ an assignment of an invention to XEROX CORPORATION (and transmittal therefor).
- ☒ a Declaration and Power of Attorney for Patent Application.

CLAIMS AS FILED

FOR	NO. FILED	NO. EXTRA	RATE	FEE
TOTAL CLAIMS	23 - 20 =	3	<input checked="" type="checkbox"/> \$18 LARGE <input type="checkbox"/> \$09 SMALL	\$ 54.00
INDEPENDENT CLAIMS	3 - 3 =	0	<input checked="" type="checkbox"/> \$78 LARGE <input type="checkbox"/> \$39 SMALL	\$ -0-
BASIC FEE	<input checked="" type="checkbox"/> LARGE ENTITY	\$690	<input type="checkbox"/> SMALL ENTITY \$345	
TOTAL FILING FEE				\$ 744.00

XXX Please charge Deposit Account No. 24-0037 in the amount of \$ 744.00.

XXX The Commissioner is hereby authorized to charge any additional fees which may be required at any time during the prosecution of this application without specific authorization, or credit any overpayment to Deposit Account No. 24-0037.

A check in the amount of \$___ to cover the filing fee is enclosed.

9/27/00

Date

Attorney of Record

Patrick R. Roche, Reg. No. 29,580
FAY, SHARPE, FAGAN,
MINNICH & McKEE, LLP
1100 Superior Avenue, Seventh Floor
Cleveland, Ohio 44114-2518
(216) 861-5582

SHOW-THROUGH COMPENSATION APPARATUS AND METHOD

This application is a continuation-in-part of co-pending U.S. Patent Application 09/200,984; filed November 30, 1998.

5

Field of Invention

This invention is directed to document scanning and printing apparatus and methods that compensate for show-through of images from a back side of a translucent document and a document adjacent the translucent image when scanning
10 the documents. It is particularly directed to the copying or scanning of such documents when they are bound together, e.g., pages of a book.

Description of Related Art

When a user wishes to reproduce an image on an image bearing
15 substrate [any document] or obtain an electronic version of the image on the document, the image is passed within a detection field of an optical sensor. The passing of the document image within the detection field of the optical sensor is termed "scanning" the document. The optical sensor detects light reflected from the surface of the document and obtains data representing the reflected light. The data
20 obtained is an electronic representation of the images formed on the document, because the colors and shadings of the images reflect different amounts and wavelengths of light.

When a double-sided translucent image bearing substrate, having images on both sides of the image bearing substrate, is scanned, the electronic
25 representation generated by scanning one side of the image bearing substrate will contain information from both sides of the image bearing substrate due to light passing through the image bearing substrate. The high contrast image information of the scanned side, or front, of the image bearing substrate will be combined with the low contrast image information from the back side of the image bearing substrate.
30 This low contrast image information from the back side of the image bearing substrate is called "show-through" image information. Similarly, when such a translucent document is scanned while adjacent a similar document, e.g., copying pages from a bound book, then some text or images from the adjacent page may also "show-

through". The elimination of residual signature in the scan of the back side and the adjacent document is the problem to be overcome by the subject development.

One way in which show-through image information is reduced is to place a black backing on the back side of the image bearing substrate during scanning.

5 The light that passes through the image bearing substrate is absorbed by the black backing. Although there is a significant reduction of the show-through image information, there is a small residual low contrast image of the back side remaining in the scanned image due to light scattering off the back side of the image bearing substrate. This method is undesirable because with a black backing any perforations
10 in the image bearing substrate and regions beyond the edges of the image bearing substrate appear as black regions in the scanned image. Additionally, trying to insert such a backing for book scanning is particularly inconvenient and undesirable.

Methods for compensation of show-through in the scanning of duplex printed documents have been previously been described in U.S. Patents 5,832,137 and
15 6,101,283 to Knox. A description of the art can also be found in G. Sharma "Cancellation of Show-through in Duplex Scanning", Proceedings International Conference on Image Processing, Sept. 10-13, 2000, Vancouver, Canada, Vol. II, pp. II-609-612.

Summary of the Invention

20 This invention provides apparatus and methods that compensate for show-through of images from a back side of a translucent image bearing substrate document and an adjacent side of another document disposed as a backing for the image document when reproducing the images.

25 Image reflectance data for a front side and back side of an image bearing substrate and the adjacent side of a backing substrate is obtained from an optical sensor that senses light reflected from the substrates. The image reflectance data is stored in a memory and is used to determine scanned density data for the front side and approximate effective absorbency data for the combination of the back side
30 and the adjacent side of the substrates during the scanning.

In accordance with an imaging model proposed here, show-through compensated density data for the front side image is obtained by subtracting a low pass filtered version of the effective absorbency data for the combination of the back side and the adjacent side from the scanned density data for the front side. A point

spread function for the low pass filter is estimated either statically or adaptively in accordance with standard linear prediction theory. The show-through compensated density data for the sides may be transformed back to show-through compensated reflectance data for each side.

5 The adjusted image data may then be stored in memory for later use when reproducing the image. In this manner, a reproduced image with no show-through may be obtained.

Brief Description of the Drawings

10 Exemplary embodiments of the apparatus and the methods of this invention will be described with reference to the following figures, wherein like numerals designate like elements, and wherein:

FIGURE 1 is a functional block diagram of one exemplary embodiment of a show-through compensation system according to this invention;

15 FIGURE 2 is an exemplary functional block diagram of the show-through removing device of Fig. 1;

FIGURE 3 is an exemplary diagram of an image on the front side of an image bearing substrate and an image on the back side "showing through" to the front side;

20 FIGURE 4 illustrates the light paths that occur when scanning an image bearing substrate that does not have an image formed on it;

FIGURE 5 illustrates the light paths that occur when scanning an image bearing substrate that has images on both the front side and the back side of the image bearing substrate, and an image on a backing sheet to the substrate, as in the scanning of the bound pages from a book;

25 FIGURE 6 is a flowchart outlining an exemplary method for adjusting detected image data to remove show-through image information according to this invention; and

30 FIGURE 7 is a flowchart outlining in greater detail one exemplary embodiment of the method for removing the show-through image information of step S900 of Fig. 6.

Detailed Description of Preferred Embodiments

Figure 1 shows a functional block diagram of one exemplary embodiment of a show-through compensation system **10** according to this invention. As shown in Fig. 1, the show-through compensation system **10** includes an optical sensor **100**, a show-through image information removal device **200**, an image data source **300**, and an image data output device **400**. These devices are coupled together via data communication links **110**, **210** and **310**, respectively. These communication links **110**, **210** and **310** may be any type of communication link that permits the transmission of data. For example, the communication links may be direct serial or parallel connections, a local area network (LAN), a wide area network (WAN), an intranet, the Internet, circuit wirings and the like.

The optical sensor **100** is any type of device that detects light input and translates the light input into image data. For example, the optical sensor **100** may be a scanning array of photosensitive sensors such as CCDs or photodiodes which are controlled to sense light reflected from an image bearing substrate. The optical sensor **100** may be a single sensor or a plurality of sensors. Additionally, the optical sensor **100** may be deployed as a two-dimensional array, for instance the type used in a digital camera.

The optical sensor **100** provides image data to an image data source **300** via the communication link **110**. The image data source **300** stores the image data in memory. The image data source **300** provides the image data to the show-through image information removal device **200** via the communication link **210** when show-through image information is to be removed. The show-through image information may be removed immediately after the image data is obtained or may be removed at some time after the image data is obtained. Furthermore, show-through image information may be removed when adjusted image data is to be sent to the image data output device **400**.

The show-through image information removal device **200** adjusts the image data to compensate for the effects of show-through image information in the electronic image data generated by scanning the image bearing substrates. The image data is adjusted to generate adjusted image data, which is output to the image data source **300** via the communication link **210**.

The image data source **300** is any type of device that is capable of receiving the adjusted image data and supplying image data to the image data output

device **400**. For example, the image data source **300** may be a computer, a microprocessor, a scanner processor, a disk drive, a tape drive, a hard disk, zip drive, CD-ROM drive, DVD drive, a network server, a print server, photocopying device or any other known or later developed device or system that is able to receive and provide image data. The image data source **300** may include a plurality of components including displays, user interfaces, memories, disk drives, and the like. For simplicity of the following description of the preferred embodiments, it will be assumed that the image data source **300** is a personal computer.

The image data source **300** stores the adjusted image data received from the show-through image information removal device **200** and provides the adjusted image data to the image data output device **400** over the communication link **310** when the image is to be output. The image output device **400** is any type of device that is capable of outputting an image. For example, the image output device **400** may be a laser printer, bubble jet printer, ink jet printer, photocopying machine, cathode ray tube (CRT), computer monitor, television, camera, or any other known or later developed device or system that is able to generate an image on a recording medium or display an image using image data or data generated from the image data. The image output device **400** generates an image based on the adjusted image data from the image data source **300**. While Fig. 1 shows a single image output device **400**, multiple image output devices **400** may be coupled to the image data source **300**.

Any combination of the elements of Fig. 1 may be integrated into a single device. For example, the optical sensor **100**, the show-through image information removal device **200**, the image data source **300** and the image output device **400** may be contained within a single device such as a digital copier, a computer with a built-in printer, or any other integrated device that is capable of outputting an image. Similarly, the optical sensor **100** and the show-through image information removal device **200** may be integrated into a single device, such as in a scanner or the like.

Alternatively, the show-through image information removal device **200** and the image data source **300** may be combined into a separate integrated device attachable upstream of a stand-alone image output device **400**. For example, the show-through image information removal device **200** and the image data source **300** may be an integrated device which interfaces with both the optical sensor **100** and one or more image output devices **400**. For example, the show-through image information

removal device **200** and the image data source **300** may be incorporated into a programmed general purpose computer, a network print server that manages printer data for a plurality of the same or different printer devices, and the like.

Furthermore, the show-through image information removal device **200**
5 may be implemented as software executing on the optical sensor **100**, the image data source **300** or the image output device **400**. Other configurations of the elements shown in Fig. 1 may be used without departing from the spirit and scope of this invention.

The term “image”, as used herein, refers to any image containing any,
10 or all, of one or more halftone images, continuous tone images, line art or other graphics images, and/or any compilation of text, that is capable of being displayed on a display device or output on an image bearing substrate. For example, an image may be a combination of graphics and text that is stored in the image data source **300**. The image may be a series of pixel values denoting the color, intensity, and/or any other
15 known or later developed image property of the particular pixels that make up the image. Although most book scanning primarily involves black and white text, the invention is applicable to color images causing the undesired show-through effects. Extension to color on a per channel basis is straightforward from the exemplary embodiments discussed herein.

The optical sensor **100** detects light reflected from the image bearing
20 substrate and translates the detected light into image data that is provided to image data source **300** and, in turn, to the show-through image information removal device **200**. The show-through image information removal device **200** adjusts detected image data to remove any show-through image information and forwards the adjusted
25 image data to the image data source **300**. The image data source **300** stores the adjusted image data and outputs the adjusted image data to the image data output device **400** when the image is to be output.

When the optical sensor **100** is used to detect reflected light from the
image bearing substrate, the image bearing substrates are scanned. For book scanning
30 this comprises sides (pages) 1 and 2 of a book sheet and a side 3 comprising the facing page of an adjacent sheet. The first scan of the image bearing substrate is the front side (side 1) of the image bearing substrate, the second scan of the image bearing substrate is the back side (side 2) of the image bearing substrate, and the third

scan is of the adjacent sheet (side 3) disposed as a backing to the substrate during the scan of the first side.

Thus, each scan of the image bearing substrates provides different image data corresponding to the image on the side of the image bearing substrate scanned with some show-through of the image on the opposite side of the image bearing substrate and the facing side of the adjacent backing substrate. The image data for the scanned sides of the image bearing substrates is provided by the image data source **300** to the show-through image information removal device **200**.

Figure 2 is a block diagram of one exemplary embodiment of the show-through image information removal device **200** of Fig. 1. As shown in Fig. 2, the show-through image information removal device **200** includes an input/output interface **201**, a controller **202**, a data alignment circuit **203**, a memory **204**, and a show-through image information cancellation device **205**. These elements are connected to one another via the control/data signal bus **206**.

The image data is provided to the show-through image information removal device **200** by the image data source **300** via the communication link **110** and the input/output interface **201**. The controller **202** causes the image data sent by the image data source **300** to be stored in the memory **204**.

Once the image data is received from the image data source **300**, the controller **202** instructs the data alignment circuit **203** to align the image data corresponding to the front side of the image bearing substrate with image data corresponding to the back side of the image bearing substrate and the facing side of the backing substrate. The back side image data will be reversed from the front side and facing side image data. Thus, when comparing information for two sides, the back side should be reversed so that the images will correspond.

After reversing, the front side image data should be aligned with the reversed back side image data and the facing side image data. Because the images are acquired at different times, or by different sensors, they are not necessarily scanned with the same spatial reference. Skew alignment, lateral shifts, and linear distortions of the images all may be required.

When the front side and the back side images are scanned using automatic feeding means, these adjustments can be determined from the geometry of the scanner, or by a calibration process which scans a test target and notes the spatial displacement of target features. The data alignment circuit **203** may also perform

alignment determinations based on, for example, alignment marks on the image bearing substrates or an image bearing substrate support, edge detection, or any other known or later developed alignment method.

The alignment requirement may be relaxed through the choice of filters used to determine show-through cancellation values, as discussed in more detail below. Thus, exact alignment is not necessary to practicing the invention. However, some alignment is desirable to reduce error in the show-through cancellation determinations. Additionally, aligning the image data may be omitted and the data alignment circuit **203** omitted from the show-through image information removal device **200** without departing from the spirit and the scope of this invention.

In one exemplary embodiment, once the image data is aligned by the data alignment circuit **203**, the show-through image information cancellation device **205** cancels the show-through image information from the image data. To cancel the show-through image information, scanned density and absorbency functions of the front, back, and facing side image layers are computed and show-through compensated densities of the images are computed by subtracting filtered absorbency data from the scanned density data. The resulting adjusted image data is stored in the memory **204** and then output to the image data source **300** via the input/output interface **201** and the communication link **210**.

Figures 3-6 illustrate one exemplary method for adjusting image data to compensate for the show-through image information. The method described with reference to Figs. 3-6 is only exemplary and is not meant to limit the invention to any one method. Rather, any method for compensating for the show-through image information that uses linearized density functions, or approximations thereof, to compensate for the show-through image information may be used without departing from the spirit and scope of this invention.

Figure 3 shows the image data generated by scanning a front side of an image bearing substrate image that includes show-through image information of an image from the back side of the image bearing substrate. As can be seen from Fig. 3, the vertical line **20** shows through from the back side of the image bearing substrate and is present in the image data of the image **30** of the letter "A" generated from scanning the front side of the image bearing substrate.

Figure 4 illustrates the light paths that occur when scanning a translucent image bearing substrate using a non-black backing. In the example shown

in Fig. 4, the translucent image bearing substrate does not have any images formed on it. Light 122 from a light source 120 is directed upon the translucent image bearing substrate 130. The light 122 from the light source 120 is incident on the front surface of the image bearing substrate 130. Portions 124 of the light 122 are scattered by the image bearing substrate 130. Other portions 126 of the light 122 are transmitted through the translucent image bearing substrate 130.

The portions 126 of the light 122 transmitted through the translucent image bearing substrate 130 are reflected by the non-black backing 140 back through the image bearing substrate 130 to an optical sensor 150. While Fig. 4 shows the reflected light 126 being reflected at a large angle, in actuality this angle is quite small and is considered to be zero. The figure is illustrative only and is not meant to be limiting in any way.

The reflectance R_p^w detected by the optical sensor 150 may be represented as:

$$R_p^w = S_p + T_p^2 R_{back} \quad (1)$$

where:

R_p^w is the reflectance detected by the optical sensor 150;

S_p represents the fraction of portions 124 of the light 122 that are scattered;

R_{back} represents the reflectance of the non-black backing;

and

T_p represents the fraction of portions 126 of the light 122 that are transmitted through the image bearing substrate. The subscript p denotes a paper image bearing substrate and the superscript w in R_p^w indicates that this is the reflectance for paper that is without print on either side (white). However, this invention is not limited to using paper, but may use any image bearing substrate. Thus, Eq. 1 shows that the reflectance R_p^w detected by the optical sensor 150 is the sum of the fraction S_p of the light 122 that is scattered and product of the backing reflectance R_{back} and the square of the fraction T_p of the light 122 transmitted through the paper is used to represent the amount of light that is transmitted through the paper image bearing substrate to the non-black backing, reflected therefrom and further transmitted back through the paper image bearing substrate to the optical sensor 150.

Figure 5 is a graphical diagram illustrating the light paths that occur when scanning a book wherein show-through image data results not only from the front and back sides of a single image bearing substrate, but that additional show-through image data occurs from a backing sheet adjacent to a scanned sheet. The following discussion assumes that the front and back sides images are black and white images. However, as will be apparent to one of ordinary skill in the art, similar light paths will occur with color or gray scale images.

As shown in Fig. 5, light **122** from the light source **120** is incident on the image bearing substrate (sheet 1) **130**. Portions **124** of the light are scattered by the front side of the substrate **130**. The remaining portion **126** of the light **122** is transmitted through the front side. The fractions of the light **122** that are scattered and that are transmitted depends on the characteristics of the image formed on the front side of the substrate **130**.

The portion **126** of the light **122** transmitted through the front side of the image bearing substrate **130** is then transmitted through the back side of the image bearing substrate **130**. Portion **127** of the light **122** that is transmitted through the back side of the image bearing substrate is dependent on the characteristics of the image on the back side of the image bearing substrate and the image bearing substrate itself.

The transmitted portion **127** of the light **122** is then reflected back from the backing **140** through the back and front sides of the image bearing substrate to the optical sensor **150**. The portion **128** of the light **122** is dependent on the characteristics of the image on the adjacent side of the backing sheet **140**. The portion **129** of the light **122** represents the portion of light that is transmitted through the back side of the substrate **130**. Portion **129** may not be the same as portions **127** or **128** since some of the portion **127** will be absorbed by the backing **140** or may be scattered by the back side of the substrate **130**. The portion **131** of the light **122** represents the portion of light passing through the front side of substrate **130**. This portion **131** may not be the same as portion **129** due to, for example, the spread of light through the image bearing substrate **130**.

In the preferred application of the subject invention, substrate **130** comprises pages 1 and 2 as the two sides of a duplex printed sheet of paper and the backing **140** is composed of an adjacent sheet and the following sheets (with page 3 on the top of the backing sheet **140**.) A white paper substrate both transmits and

scatters light. Let S_p denote the fraction of light that is scattered upward by a sheet of paper and T_p denote the fraction that is transmitted by a sheet of paper. The paper appears white in color because it scatters much more light than it transmits ($T_p \ll S_p$).

When page 1 is viewed from the top, as shown in Fig. 5, the image seen is attributable to the combination of the light rays that are scattered by the sheet of the paper and those that are transmitted through the sheet of paper, reflected back and retransmitted through the paper. The spatial reflectance profile corresponding to this view of page 1 (this is what is sensed by a scanner scanning page 1 with the remaining pages forming the backing) can be approximated as:

$$R_1^s(x,y) = T_1^2(x,y) S_p + T_1^2(x,y) T_p^2 T_2^2(x,y) R_3^s(x,y) \quad (2)$$

where x,y , denote the spatial coordinates, $T_1(x,y)$ is the transmittance of the image layer on page 1, $T_2(x,y)$ is the transmittance of the image layer on page 2, and $R_3^s(x,y)$ is the spatial reflectance profile of page 3 viewed from the top with subsequent pages of the book forming the backing. Note that the right hand side of Eq. 2 is the summation of two terms, the first of which corresponds to the part of the incident light that is scattered back by sheet 1 and the second of which corresponds to the part of light that is transmitted by sheet 1. Note also that the second term depends on the transmittance $T_2(x,y)$ of the back side image layer (on page 2) and the reflectance $R_3^s(x,y)$ of the pile of sheets forming the backing to sheet 1. This dependence of the (scanned) reflectance of page 1 on page 2 and the backing represents undesired show-through. The goal of show-through correction is to remove this undesired dependence.

Show-through corrected Image for Page 1

For consistency's sake, the term "show-through corrected image for page 1" refers to the image that would have been obtained if only the front face of page 1 were printed and there was no printing on the back side (page 2) or subsequent sheets of paper. Using this definition in Eq. 2 we can see that the reflectance for the show-through corrected image of page 1 is obtained by setting the transmittance of image layer 2 to unity ($T_2(x,y) = 1$) and the reflectance of the "backing" to the reflectance for a pile of blank sheets ($R_3^s(x,y) = R_p^w$):

$$R_1(x,y) = T_1^2(x,y) S_p + T_1^2(x,y) T_p^2 R_p^w \quad (3)$$

where $R_1(x,y)$ is the reflectance of the show-through corrected image of page 1 and R_p^w is the reflectance of a pile of blank sheets (no printing anywhere). Note that alternate definitions of show-through corrected image may be used without impacting the following analysis or the applicability of the method.

The goal of show-through correction is to recover the reflectance $R_1(x,y)$.

10 **Reflectance for a Pile of Blank Sheets**

Consider a large pile of paper bearing no printing on any sheet. Let R_p^w denote the reflectance of this large pile of paper. Since there is not printing on either side, we can use Eq. 2 with $T_1(x,y) = T_2(x,y) = 1$ to obtain:

$$15 \quad R_p^w = S_p + T_p^2 R_p^w \quad (4)$$

where the reflectance term corresponding to the backing has been replaced by R_p^w because with a large pile of unprinted paper removing a sheet of paper will not change the reflectance in any significant way. Eq. 4 indicates that the reflectance of a large pile of unprinted paper can be computed from the scattering and reflection properties of paper as:

$$R_p^w = S_p / (1 - T_p^2) \quad (5)$$

25 Note that through a similar argument it can be seen that S_p corresponds to the reflectance of a sheet of paper with a black backing, and $(S_p + T_p^2)$ is the reflectance of a sheet of paper with a perfectly reflecting white backing. Also observe that substituting (5) in (3) a simpler expression is obtained for the reflectance of the show-through corrected image of page 1:

$$30 \quad R_1(x,y) = T_1^2(x,y) (S_p + T_p^2 R_p^w) = T_1^2(x,y) R_p^w \quad (6)$$

Linearized Model of Show-through

For reasons that will become clear later, it is advantageous to express Eq. 2 in normalized density space, where the normalized density is obtained as the negation of the logarithm of the normalized reflectance, obtained by dividing reflectance of the pixel with the reflectance for a pile of blank sheets:

$$\begin{aligned}
 D_1^s(x,y) &\equiv -\ln(R_1^s(x,y)/R_p^w) \\
 &= -\ln(T_1^2(x,y)) - \ln((S_p + T_p^2 T_2^2(x,y) R_3^s(x,y))/R_p^w) \\
 &= -\ln(T_1^2(x,y)) - \ln(S_p/R_p^w + T_p^2 T_2^2(x,y) R_3^s(x,y)/R_p^w) \\
 &= -\ln(T_1^2(x,y)) - \ln((1 - T_p^2) + T_p^2 T_2^2(x,y) R_3^s(x,y)/R_p^w) \\
 &= -\ln(T_1^2(x,y)) - \ln(1 - T_p^2 [1 - T_2^2(x,y) R_3^s(x,y)/R_p^w]) \\
 &= D_1(x,y) - \ln\{1 - T_p^2 [1 - T_2^2(x,y) T_3^s(x,y)]\}
 \end{aligned} \tag{7}$$

where $\ln(\cdot)$ denotes the natural logarithm, and

$$D_1(x,y) \equiv -\ln(R_1(x,y)/R_p^w) = -\ln(T_1^2(x,y)) \tag{8}$$

(see Eq. 6) is the normalized density for the show-through corrected image for page 1, and

$$T_3^s(x,y) \equiv R_3^s(x,y)/R_p^w \tag{9}$$

is the normalized reflectance corresponding to the scan of page 3.

Since $T_p \ll S_p < 1$ and all other reflectance and transmittance terms in Eq. 7 are bounded between 0 and 1, we can see that $0 < T_p^2 [1 - T_2^2(x,y) T_3^s(x,y)] \ll 1$. Therefore, we can use the approximation: $\ln(1-x) \approx -x$ for $|x| \ll 1$ in Eq. 7 with $x \equiv T_p^2 [1 - T_2^2(x,y) T_3^s(x,y)]$ to get:

$$\begin{aligned}
 D_1^s(x,y) &\approx D_1(x,y) + T_p^2 [1 - T_2^2(x,y) T_3^s(x,y)] \\
 &\approx D_1(x,y) + T_p^2 A_{23}^e(x,y)
 \end{aligned} \tag{10}$$

where

$$A_{23}^e(x,y) \equiv [1 - T_2^2(x,y) T_3^s(x,y)] \tag{11}$$

Note that Eq. 10 states that the density corresponding to the scan of page 1 is the sum of the density for the show-through corrected image for page 1 and a show-through component that is equal to the effective absorptance $A_{23}^e(x,y)$ multiplied by the factor T_p^2 .

$$D_1^s(x,y) = D_1(x,y) + H(x,y) * A_{23}^e(x,y) \quad (12)$$

Show-through Correction

$$D_1(x,y) = D_1^s(x,y) - H(x,y) * A_{23}^e(x,y) \quad (12.1)$$
$$D_1^s(x,y) \equiv -\ln (R_1^s(x,y)/R_p^w) \quad (13)$$
$$T_2^2(x,y) \approx R_2^s(x,y)/R_p^w \quad (14)$$

14

obtained by neglecting the show-through in the scan of page 2. It can be readily seen that the error introduced in the show-through correction due to this approximation is of the order of T_p^4 and therefore usually negligible (note that the transmittance of paper, T_p , is quite small). If necessary, this approximation error may be further reduced by using an iterative approach in which the scanned reflectance in Eq. 14 above is replaced by the show-through corrected values from the last estimate.

Alignment and Show-through Point Spread Function

In order to apply the show-through correction described by Eq. 12, one needs to know the show-through point-spread function $H(x,y)$ and the relative alignment between the scans for pages 1, 2 and 3. Approximate alignment can be determined by detecting the edges of the pages, if any remaining alignment error does not vary over the page (i.e., there is no skew or other distortions) the theory of optimal linear filtering, for example as described in Simon Haykin, Adaptive Filter Theory, Prentice Hall, 1991, can be used to determine the point spread function from regions of the scan in which there is no printing on page 1 and corresponding regions of scans from page 2 and page 3. Alternately, if there are (small) variations in the alignment over the page, adaptive linear filters (for example, as described in Simon Haykin, Adaptive Filter Theory, Prentice Hall, 1991) can be used for the estimation of the show-through point spread function. If the relative alignment between the scans of pages 2 and 3 also varies over the page (as will normally be the case), two separate adaptive filters may be used and adapted independently, one representing the show-through due to page 2 (adapted and directly used in regions where there is printing in page 2 and no printing on pages 1 and 3) and another representing the show-through due to page 3 (adapted and directly used in regions where there is printing in page 3 and no printing on pages 1 and 2). In other regions, the filter coefficients can be used to "register" the images on pages 2 and 3 relative to each other and cancel show-through using estimated $A_{23}^e(x,y)$ and one of the filters.

The use of adaptive filters has a significant advantage over non-adaptive filters in that the registration of the front and back side images is not required to be extremely precise. As long as the filter sizes are reasonably large, they can adapt and compensate for small changes in the registration.

Note that one could potentially think of using the mode of Eq. 2 directly for the correction of show-through in reflectance space. However, the

method would require perfect alignment of the images and a separate method of estimating the show-through point spread function. The use of density space provides a nice linear approximation to the problem allowing the use of theory from linear filtering in the estimation of the show-through point spread function, and also the use of adaptive filters which can significantly reduce the requirements for alignment.

Reflectance Data for Show-through Correct Image

Once the density for the show-through corrected image for page 1 is obtained, reflectance corresponding to this show-through corrected image can be readily obtained as:

$$R_1(x,y) = R_p^w \ln(-D_1(x,y)) \quad (15)$$

As noted earlier, $R_1(x,y)$ corresponds to the reflectance that would have been obtained if there were printing on page 1 alone and page 2 and the other pages forming the backing were blank (note there is no objectionable show-through in this case).

The show-through adjusted image data is stored in memory and may also be stored in the image data source 300 for later use in outputting the image using, for example, the image output device 400.

Figure 6 is a flowchart outlining one exemplary embodiment of a method of compensating for show-through image information in image data. As shown in Fig. 6, beginning in step S500, control continues to step S600, where the image data is input. Next, in step S700, the image data is stored. Then, in step S800, if necessary, the image data is aligned. Control then continues to step S900.

In step S900, the image data is adjusted to remove any show-through image information. Then, in step S1000, the adjusted image data is stored. Next, in step S1100, the control routine ends.

Figure 7 is a flowchart outlining one exemplary embodiment of the method for adjusting the image data of step S900 of Fig. 6. As shown in Fig. 7, beginning in step S900, control continues to step S910, where the (spatially varying) scanned density of the front side of the image bearing substrates is determined based on the image data from the scanning of the pages. As described above, this may be done using the detected reflectances and the first line of Eq. 7 for the front side.

Next, in step **S920**, the approximate transmittance of the back side image and the normalized reflectance of the adjacent side image is determined from the scan data. This may be done, for example, using Eqs. 14 and 9. In step **S925**, the back side transmittance and the normalized reflectance of the adjacent side image are combined to obtain the effective absorptance of the combination. Eq. 11 may be used for this. Then, in step **S930**, the show-through point spread function of the image bearing substrate is estimated. As described above, this approximation may be performed automatically using linear prediction filters to approximate the show-through point spread function. Control then continues to step **S940**.

In step **S940**, density for show-through compensated front side of the image bearing substrate is determined from the scanned densities, the approximated absorbencies, and the estimated show-through point spread function. This may be done, for example using Eq. 12.1. Then, in step **S950**, show-through compensated reflectances for the front side image is computed, for example, by using Eq. 15. Next, in step **S960**, control returns to step **S1000** in Fig. 6.

The above described equations may be applied to each pixel, group of pixels, and the like, of an image either through hardware, software, or a combination of hardware and software. The choice of hardware or software may depend on the speed and efficiency requirements of the system on which the show-through cancellation is implemented. Note also that for the conversion from reflectance to density the natural logarithm was used as an illustrative example in the description of the preferred embodiment, a logarithm to any other base may be used equally effectively, as the use of a different logarithm base only changes the “density” by a multiplicative factor. Furthermore, for the purposes of efficiency the functions for “density” and “absorptance” defined in this disclosure may be replaced by suitable equivalents or approximations that may be computed faster or evaluated using look-up tables. Also while the preferred embodiment has been described with reference to the scanning of black and white or grayscale images the invention is directly applicable to color images where the operations are performed on a perchannel basis. Additionally, it is understood that the entire images are not needed for the realization of the invention described herein and the show-through compensation may be employed by using buffers that make available required parts of the images on the three relevant pages.

As shown in Figs. 1 and 2, the show-through image information removal device **200** may be implemented on a general purpose or special purpose computer. However, the show-through image information removal device **200** can also be implemented on a programmed microprocessor or microcontroller and peripheral integrated circuit elements, an ASIC or other integrated circuit, a hardware electronic or logic circuit such as a discrete element circuit, a programmable logic device such as a PLD, PLA, FPGA, or PAL, or the like. In general, any device on which a finite state machine capable of implementing the flowcharts shown in Figs. 6 and 7 can be used to implement the show-through image information removal device **200** of this invention.

While this invention has been described with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, the preferred embodiments of the invention as set forth herein are intended to be illustrative, not limiting. Various changes may be made without departing from the spirit and scope of the invention. In particular, the different functions described herein may be approximated, for example, using look-up tables for efficient implementation.

What is claimed is:

1. A method for removing show-through image information from image data generated by scanning a duplex printed document adjacent another

document comprising:

receiving the image data for a front side and a back side of the document and an adjacent side of the other document;

determining scanned density data for the front side and effective absorbency data for the combined back and adjacent sides from the received image data;

determining show-through compensated density data for the front side image from the received image data, the scanned density data and the effective absorbency data.

2. The method of claim 1, further comprising transforming the show-through compensated density data for one or all of the images into show-through compensated reflectance image data.

3. The method of claim 1, wherein determining the show-through compensated density data includes:

spatially filtering the effective absorbency data for at least one of the back or adjacent images; and

subtracting the spatially filtered absorbency data from the scanned density data for the front side image.

4. The method of claim 3, wherein the spatial filtering includes using a filter corresponding to a pre-determined show-through point spread function.

5. The method of claim 3, wherein the spatial filtering uses a filter corresponding to a show-through point spread function estimated from the scanned data for the three sides.

6. The method of claim 5, wherein the spatial filtering is performed using a digital filter.

7. The method of claim 6, wherein the digital filter is an adaptive filter.

8. The method of claim 1, wherein determining the scanned density data for the sides comprises determining a logarithm (or approximation thereof) of the ratio of the received image data for a region of the image bearing substrate containing an image and for a region of the image bearing substrate having no image on either the front or the back sides.

9. The method of claim 1, wherein the scanned density of the front side is determined using the relationship:

$$D_1^s(x,y) = -\ln(R_1^s(x,y)/R_p^w)$$

where $\ln()$ denotes the natural logarithm.

10. The method of claim 1, wherein the absorbency of the back and adjacent sides is approximated using the relationship:

$$A_{23}^e(x,y) \equiv [1 - T_2^2(x,y)T_3^s(x,y)]$$

where $T_3^s(x,y)$ and $T_2^2(x,y)$ are obtained from the scanned data as $T_3^s(x,y) \equiv R_3^s(x,y)/R_p^w$ and $T_2^2(x,y) \approx R_2^s(x,y)/R_p^w$.

11. The method of claim 1, wherein the show-through compensated density data is determined using the relationship:

$$D_1(x,y) = D_1^s(x,y) - H(x,y) * A_{23}^e(x,y).$$

12. A show-through image information removal apparatus for removing show-through image information from image data generated by scanning an image bearing substrate having a front side image and a back side image, wherein the substrate is adjacent a backing comprising an adjacent side image comprising:

an input/output interface;

a memory; and

a show-through image information compensation device; wherein:

image data for the front side image, the back side image and the adjacent side image is received through the input/output interface and stored in the memory, and the show-through compensation device determines scanned density data for the front-side and

approximate absorbency data for the combination of the back and adjacent side
images from received image data for the front side image, the back side image and the
adjacent side image and determines show-through compensated density data for the
front side image based on the scanned density data and the approximate absorbency
5 data.

13. The apparatus of claim 12, further comprising a data alignment
circuit for aligning image data of the front, back and adjacent side images.

10 14. The apparatus of claim 13, wherein the show-through image
information compensation device comprises:

means for determining scanned density data for the front side image
from the received image data for the front side image;

15 means for approximating an absorbency of the combination of back
and adjacent sides and estimating a show-through point spread function;

means for determining show-through compensated density data for the
front side from the scanned density data, the approximated absorbencies and the
estimated show-through point spread function.

20 15. The apparatus of claim 14, wherein the show-through
correction is based on a linearized relationship between the image data for the front,
back and adjacent sides.

16. The apparatus of claim 14, wherein the estimated show-through
25 point-spread function is estimated using a digital filter.

17. The apparatus of claim 16, wherein the digital filter is an
adaptive filter.

30 18. The apparatus of claim 14, wherein the show-through image
information compensation device determines the scanned density data by determining
a logarithm of a ratio of the received image data of a region having an image on the
image bearing substrate and received image data of a region having no image on the
image bearing substrate.

19. The apparatus of claim 12, wherein the normalized reflectance of the back side image is determined by the show-through image information compensation device using the relationship:

5
$$T_3^s(x,y) \equiv R_3^s(x,y)/R_p^w.$$

20. The apparatus of claim 12, wherein the absorbency of the combination of back and adjacent sides is approximated by the show-through image information compensation device using the relationship:

10
$$A_{23}^e(x,y) \equiv [1 - T_2^2(x,y)T_3^s(x,y)]$$

where $T_3^s(x,y)$ and $T_2^2(x,y)$ are obtained from the scanned data as $T_3^s(x,y) \equiv R_3^s(x,y)/R_p^w$ and $T_2^2(x,y) \approx R_2^s(x,y)/R_p^w$.

21. The apparatus of claim 12, wherein the show-through image information compensation device determines show-through compensated density data by determining the show-through compensated density data using the relationship:

$$D_1(x,y) = D_1^s(x,y) - H(x,y) * A_{23}^e(x,y).$$

22. An image forming device including the show-through image information removal apparatus of claim 12.

23. A method for removing show-through image information from image data generated by scanning a duplex printed document, wherein the show-through compensation is based on a linearized relationship between the scanned data for the front, back and adjacent side images, and wherein the front side image data is in density space.

ABSTRACT



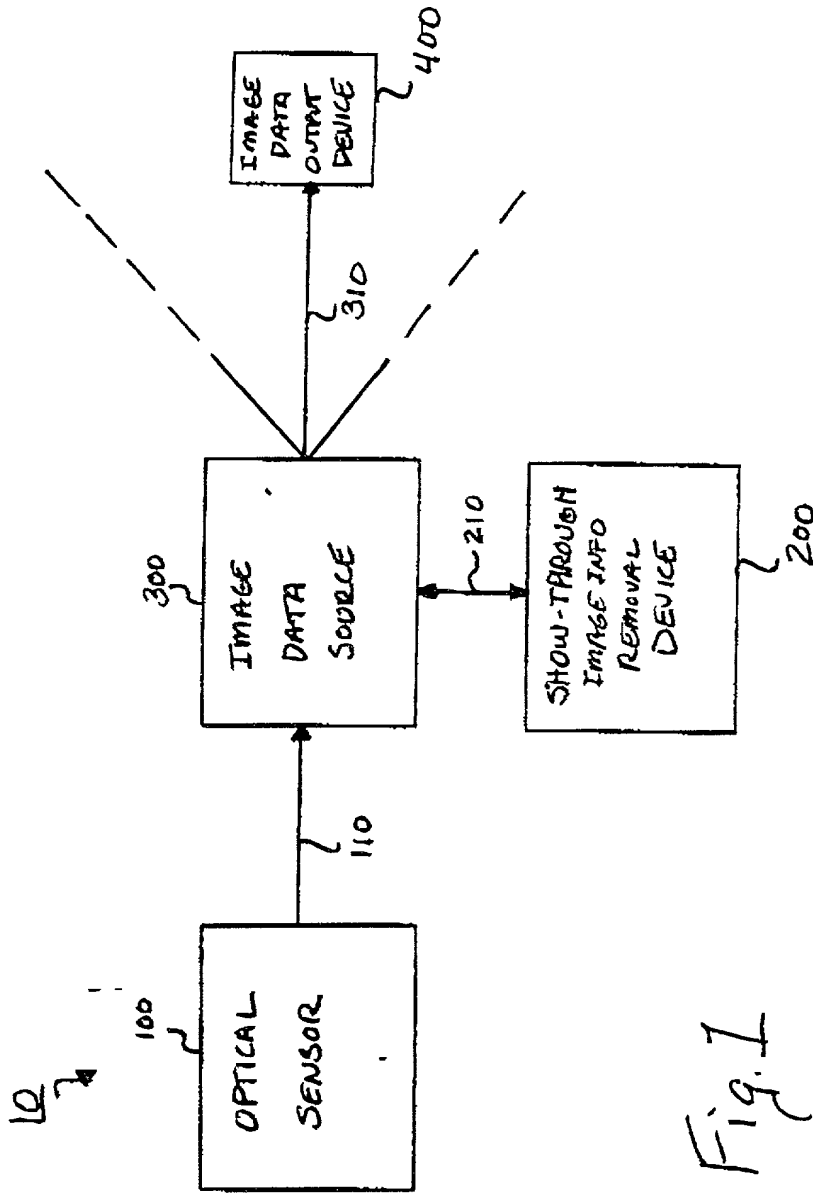


Fig. 1

Fig. 3

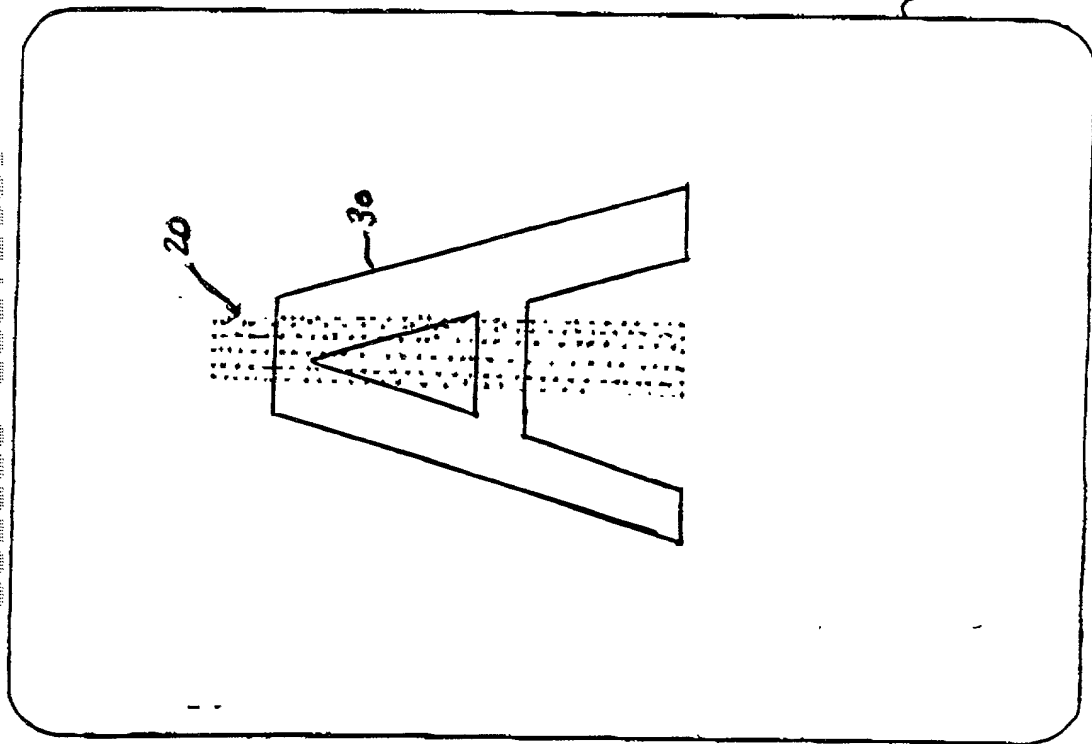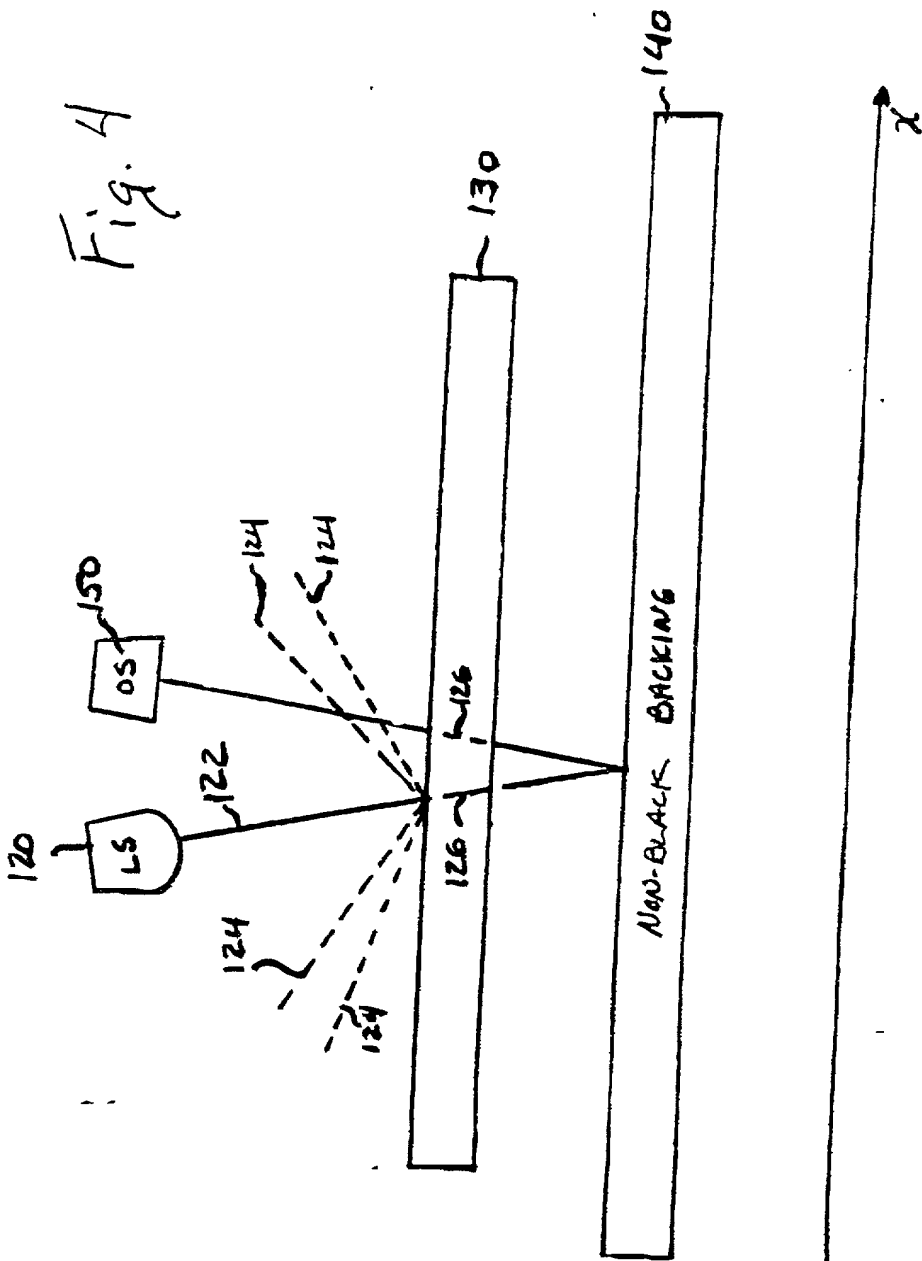

Front Side



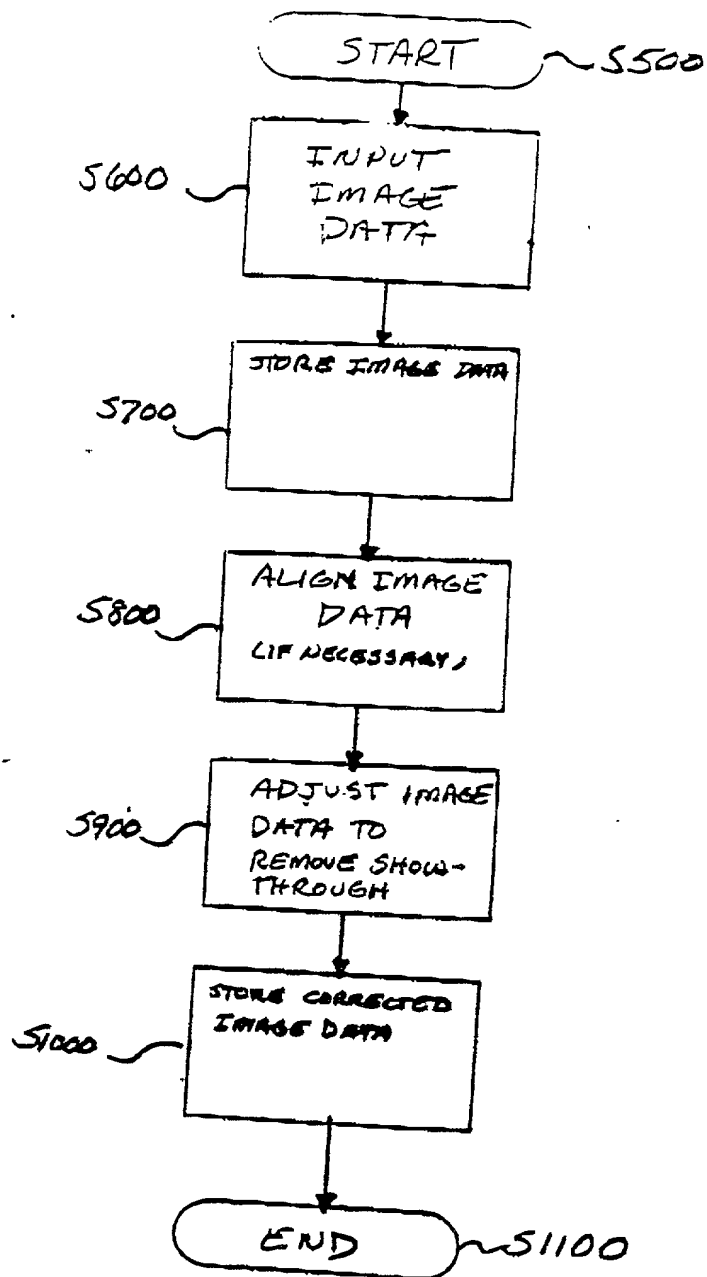


Fig. 6

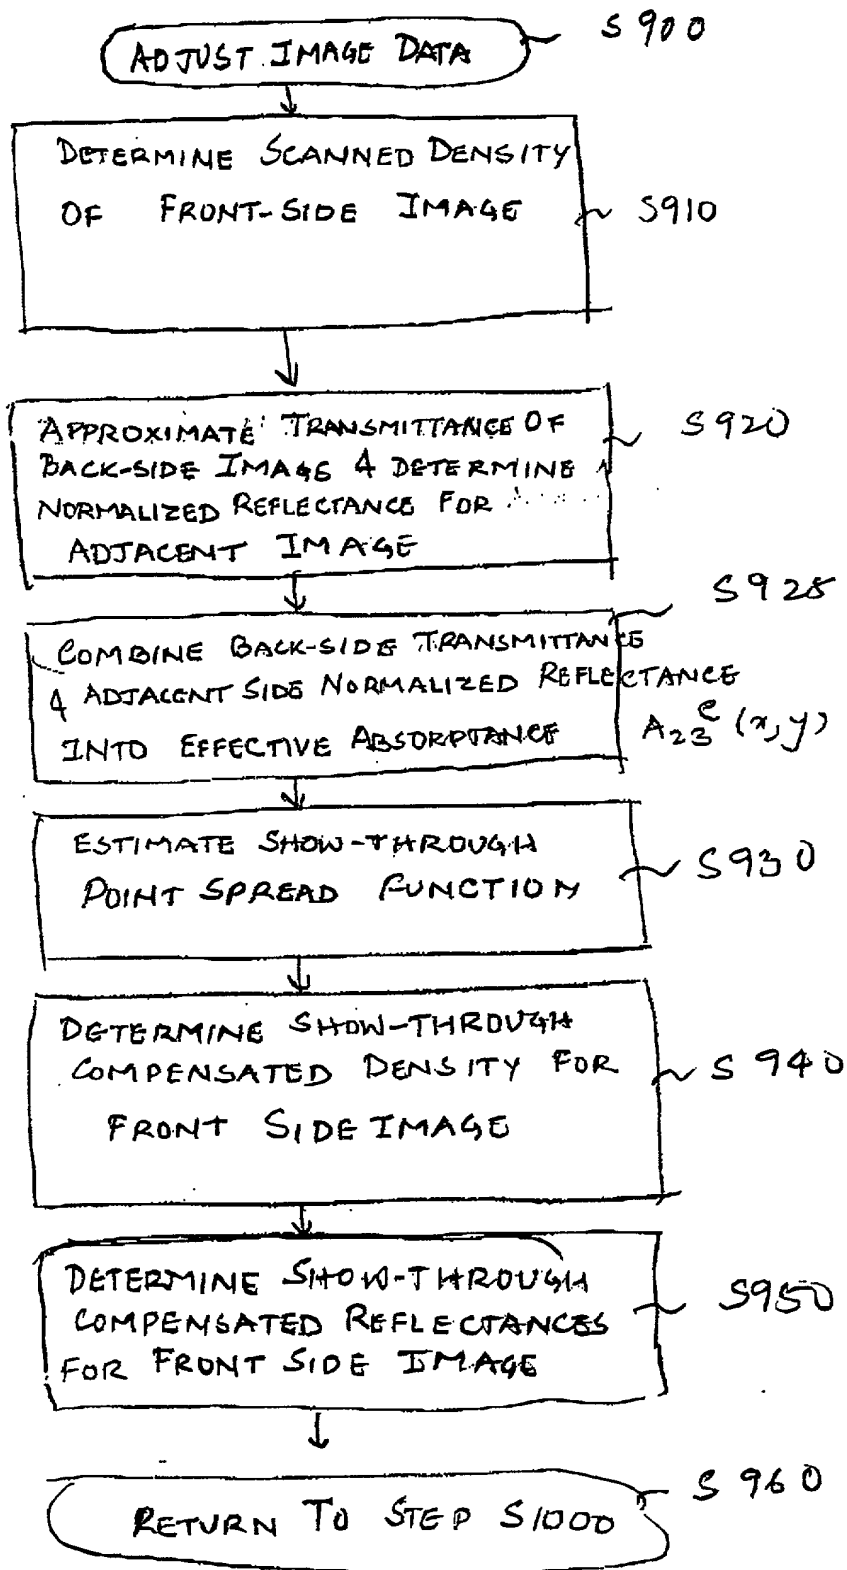


FIG. 7.

Attorney Docket No. XER 2 0318
D/986272

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SHOW-THROUGH COMPENSATION APPARATUS AND METHOD

the specification of which

xx is attached hereto

OR was filed on
Application Serial No.
and was amended on (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application(s) for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

(Number)

(Country)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Prior Provisional U.S. Patent Application(s):

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under Title 35, United States, Section 120 of any United States application(s) or any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information which is material to patentability as defined in Title 37, of Federal Regulations Code, Section 1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Patent Application(s):

02/200.984

(Application Serial No.)

November 30, 1998

(Filing Date)

Pending

(Status)

(patented, pending, abandoned)

002260-092260

Attorney Docket No. XER 2 0318
D/9986271
Page 2 of 2

POWER OF ATTORNEY. As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute my application and transact all business in the Patent and Trademark Office connected therewith.

Steven M. Bandy	Reg. No. 40,492	Mark E. Bandy,	Reg. No. 35,788
Brian G. Bandy	Reg. No. 41,463	John P. Cornely,	Reg. No. 41,687
Joseph D. Bandy	Reg. No. 37,123	Christopher R. Fagan,	Reg. No. 22,987
Jude A. Fry	Reg. No. 38,340	Steven M. Haas,	Reg. No. 37,841
W. Scott Harter	Reg. No. 42,629	Michael E. Hudzinski,	Reg. No. 34,185
Richard M. Harter	Reg. No. 33,000	Thomas E. Kocovsky, Jr.,	Reg. No. 28,383
Sandra M. Harter	Reg. No. 33,722	Brian F. Kondas,	Reg. No. 40,685
Scott A. Harter	Reg. No. 33,961	James W. McKee,	Reg. No. 26,482
Richard J. Harter	Reg. No. 24,175	Jay P. Moldovanyi,	Reg. No. 29,678
Philip J. Harter	Reg. No. 31,280	Timothy E. Nauman,	Reg. No. 32,283
Patrick R. Harter	Reg. No. 29,580	Albert P. Sharpe, III,	Reg. No. 19,879
R. Scott Harter	Reg. No. 37,450	Mark S. Svat,	Reg. No. 34,261
James E. Harter	Reg. No. 47,056	John E. Beck	Reg. No.
22,833	Mark Costello	Reg. No. 31,342	Richard B.
Domingo	Reg. No. 36,784		
Henry Fleischer	Reg. No. 25,582	Encene O. Palazzo	Reg. No. 20,881

SEND CORRESPONDENCE TO:

Albert P. Sharpe, III
Fay, Sharpe, Fagan & McInnes, LLP
1100 Superior Ave.
Cleveland, Ohio

DIRECT TELEPHONE CALLS TO:
(name and telephone number)

Albert P. Sharpe, III
61661-5582

I hereby declare that the statements made herein of my knowledge are true and that all statements made on information received are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States code and that such willful false statements may constitute the crime of perjury under the laws of the United States and may constitute the crime of perjury under the laws of the State of New York.

Full name of sole inventor: CAURAV S. SHARMA

Inventor's Signature: *CAURAV S. SHARMA*

Residence: Webster, NY 14580

Country of Citizenship: India

Date: 26 Sept 2000

Post Office Address: 3 Woodrose Drive
Webster, NY 14580

Full name of second inventor: KEITH T. KNOX

Inventor's Signature: *Keith T. Knox*


Residence: Rochester, NY 14610

Country of Citizenship: USA

Date: 26 Sept 2000

Post Office Address: 115 Babcock Drive
Rochester, NY 14610

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

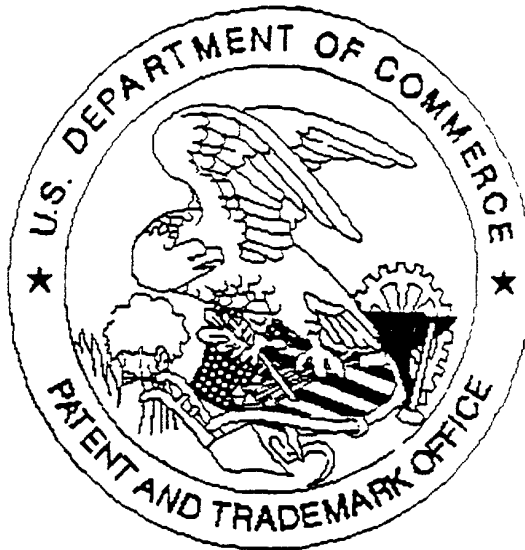

Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available.

Declaration